

1                      2                      3                      4                      5                      6

A

A

B



B

C

C

D

D

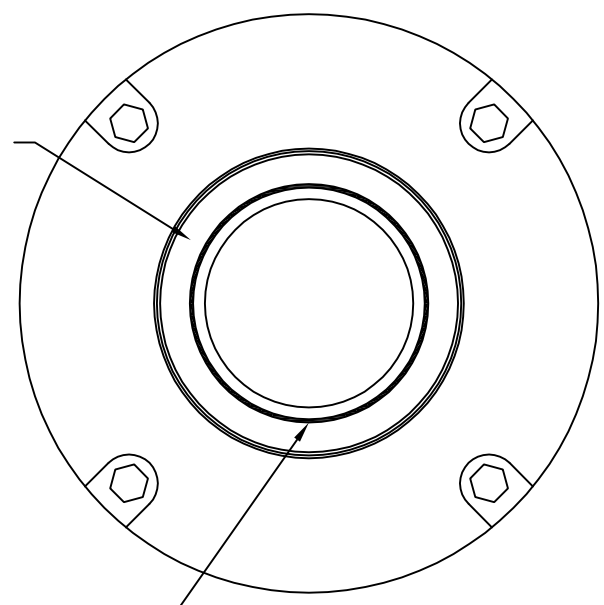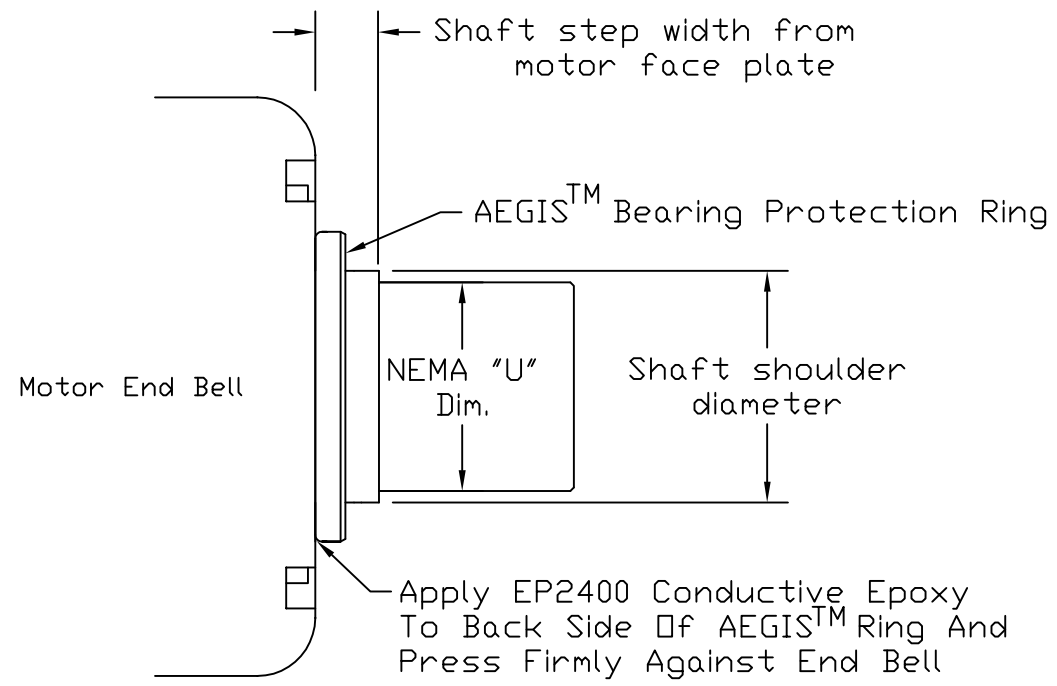

Conductive Micro Fiber


Note:  
AEGIS™ Supplied With EP2400 Conductive Epoxy

SGR □□

1.60" (40.6mm)	4.60" (116.8mm)
2.10" (53.3mm)	5.10" (129.5mm)
2.68" (68.1mm)	5.60" (142.2mm)
3.10" (78.7mm)	6.10" (154.9mm)
3.60" (91.4mm)	6.60" (167.6mm)
4.10" (104.1mm)	7.10" (180.3mm)

Patented Technology

THEIRIN, ARE THE EXCLUSIVE PROPERTY OF ELECTRO STATIC TECHNOLOGY ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT CONSENT, BE REPRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT BUSINESS WITH E.S.T.

UNLESS OTHERWISE SPECIFIED		ELECTRO STATIC TECHNOLOGY AN ITW COMPANY
DIMENSIONS ARE IN:		
MILLIMETERS <input type="checkbox"/>	<input type="checkbox"/>	31 WINTERBROOK ROAD, MECHANIC FALLS, MAINE 04256 PHONE (207)998-5140 FAX (207)998-5143
INCHES <input type="checkbox"/>	<input type="checkbox"/>	
UNTOLERANCED DIMENSIONS		AEGIS™ Solid Bearing Protection With Conductive Epoxy Mounting
4/20/2010	ENGINEER: J. Richardson	EST P/N:
		Rev.

1                      2                      3                      4                      5                      6