

1 2 3 4 5 6

A

A

B



B

C

C

D

D

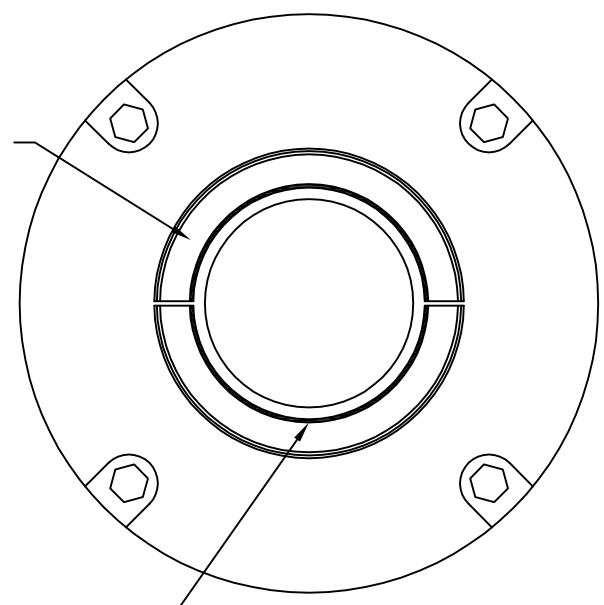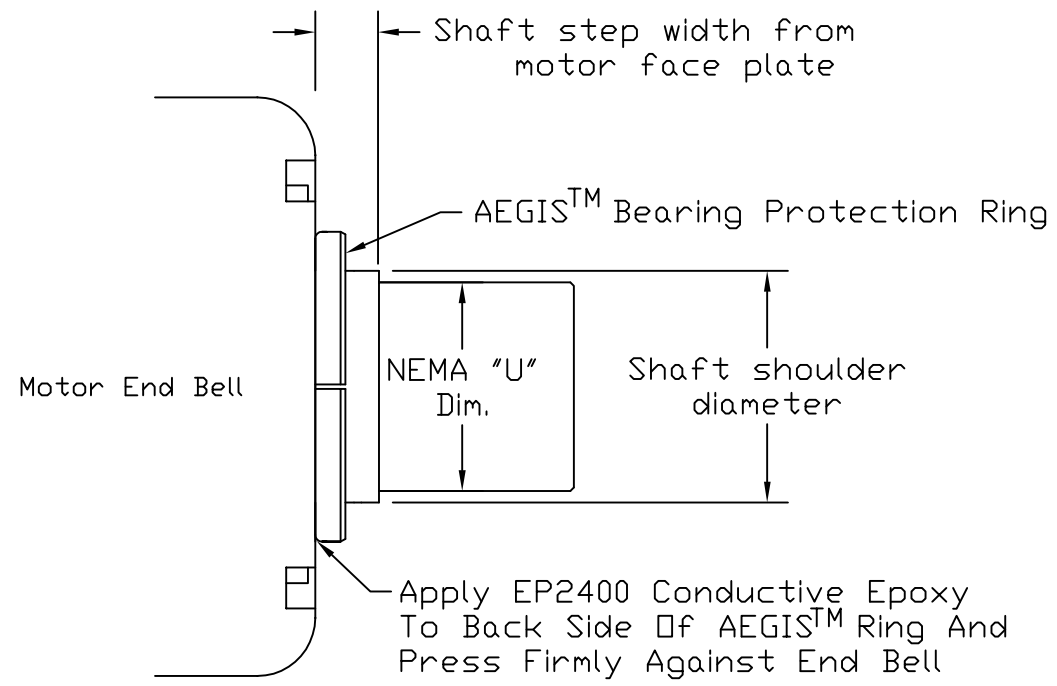

Conductive Micro Fiber


Note:
 AEGIS™ Supplied With EP2400 Conductive Epoxy

SGR □□

1.60" (40.6mm)	4.60" (116.8mm)
2.10" (53.3mm)	5.10" (129.5mm)
2.68" (68.1mm)	5.60" (142.2mm)
3.10" (78.7mm)	6.10" (154.9mm)
3.60" (91.4mm)	6.60" (167.6mm)
4.10" (104.1mm)	7.10" (180.3mm)

Patented Technology

THEREIN, ARE THE EXCLUSIVE PROPERTY OF ELECTRO STATIC TECHNOLOGY ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT CONSENT, BE REPRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT BUSINESS WITH E.S.T.

<small>UNLESS OTHERWISE SPECIFIED</small> <small>DIMENSIONS ARE IN:</small> MILLIMETERS <input type="checkbox"/> INCHES <input type="checkbox"/> <small>UNTOLERANCED DIMENSIONS</small>	 ELECTRO STATIC TECHNOLOGY AN ITW COMPANY 31 WINTERBROOK ROAD, MECHANIC FALLS, MAINE 04256 PHONE (207)998-5140 FAX (207)998-5143
<small>4/20/2010</small> <small>ENGINEER: J. Richardson</small>	
EST P/N:	Rev.

1 2 3 4 5 6