

## Local Motor Shop Helps Kansas Water Authority Solve Bearing-Damage Problem

Dan Biby learned it all the hard way. An ordeal concerning several inverter-controlled pump motors with bearing damage made him a believer in the need for shaft grounding.

### Killer Shaft Voltages

Although destructive currents can occur in any motor, they are more common in motors controlled by inverters, also known as variable frequency drives (VFDs). VFDs can save 30% or more in energy costs, but, they induce motor-shaft voltages that damage bearings. In fact, the cost of repairing or replacing failed motor bearings can wipe out any savings that a VFD yields and severely diminish the reliability of an entire system. Contractors and consulting-specifying engineers (CSEs) end up with unhappy customers, who soon discover that most warranties do not cover electrical bearing damage. This typically leads to finger pointing and the CSE and end user getting stuck with repair costs.

### Case in Point

Electrical engineer Dan Biby of Professional Engineering Consultants (PEC), Wichita, KS, helped design the new Reverse Osmosis Water Treatment Center for the city of Hutchinson, Kansas. With the capacity to pump 10 million gallons of drinking water daily, the plant is the solution to a groundwater contamination problem. Pumps lift contaminated water from beneath an industrial area and remove most of its volatile organic compounds (VOCs) through reverse osmosis and aeration. The water is then diluted with uncontaminated water from wells across town before being pumped to the city's supply towers. All of the pump motors are controlled by VFDs that provide adjustability in flow rate and pressure.



*The Reverse Osmosis Water Treatment Center, Hutchinson, Kansas*

Within two months of the plant's completion, one of its high-service, 250 HP vertical pump motors was making the telltale whine of fluted bearings, and Biby soon found himself in charge of a remediation project that would last more than two years. "The motor manufacturer replaced the bearings on that first motor," Biby recalls. "But when we soon had the same problem with the rest of the motors, the manufacturer concluded it wasn't a bearing problem."

Biby shipped some motors to a repair shop, but when they were re-installed, the noise began again. The repairs had been inadequate, and Biby recouped some of the cost. Then he tried Independent Electric Machinery Company (IEMCO), a Kansas City motor repair shop.

"We had never experienced this problem at this magnitude," Biby continues. "Finding out what was causing it was exhausting, but Scott Wilkins' team at IEMCO was a lot of help. Once we concluded that drive-induced shaft voltage was the culprit, we shipped the motors to IEMCO for repair."

### A Proven Solution

IEMCO had developed the Vertical Motor Solution, a virtually foolproof process to prevent electrical bearing damage caused by stray shaft currents in vertical hollow-shaft motors. And for six years, Scott Wilkins, the company's manager of motor shop operations, had overseen the reconditioning of hundreds of vertical pump motors, none of which had experienced repeat bearing failure.

IEMCO usually works on motors with failed bearings. After replacing the pitted bearings, his team installs a shaft grounding ring next to the motor's guide (lower) bearing and, using proprietary techniques, applies ceramic insulation to the carrier that holds the thrust (upper) bearing in place at the motor's drive end. For medium-voltage motors, Wilkins uses the larger AEGIS® PRO grounding ring, designed for motor shafts to 30" in diameter.

Coordinating the remediation with Biby was Don Koci, superintendent of water treatment systems for the City of Hutchinson. To keep the water plant up and running, they shut down and shipped only one or two motors at a time. An IEMCO technician took shaft voltage readings for each motor after the motor was repaired, to confirm that voltages were below a level that could damage bearings.

"As far as I'm concerned, IEMCO is the best around," says Biby. "I don't think there are very many motor shops with their level of experience installing AEGIS® rings on these motors. And it is one of a very few motor repair shops that provides a warranty on the bearings against VFD-induced bearing damage for the life of the motor. They obviously know their stuff."

After the first 10 damaged motors had been successfully reconditioned, Koci sent the plant's remaining 7 pump motors to IEMCO for preventive maintenance, at the city's expense. Four were horizontal pump motors, in which IEMCO installed an AEGIS® ring at the nondrive end and ceramic-coated bearings at the drive end. By the end of 2011, all 17 of the plant's pump motors were protected from electrical bearing damage. Today, they are all still running without any problems.

### Hindsight Is 20/20


Biby is glad to have the problems behind him. "We've learned a lot," he notes, "and we have updated our motor specifications to include shaft grounding rings on all new motors that will be connected to VFDs. We insist that the shaft grounding devices be factory installed or installed by a reputable motor shop with expertise in their proper installation. We also specify that, if the devices are not factory installed, they should be tested by a third party to ensure no shaft currents are present. And lastly, we require a warranty against VFD-induced bearing damage or failure for the life of the motor."



The motors atop these vertical hollow-shaft pumps (at the Reverse Osmosis Water Treatment Center in Hutchinson, Kansas) provide thrust to the pumps' drive ends.

"We use the rings on all of our jobs to eliminate downtime, replacement, and installation costs. Installing rings can prevent these problems altogether. And the cost is insignificant when compared to total project cost."

Realizing that motors could be built to withstand shaft currents in the first place, a few forward-looking motor manufacturers now offer models with the AEGIS® Shaft Grounding Ring factory installed, but retrofitting is still the most common way to prevent electrical bearing damage.

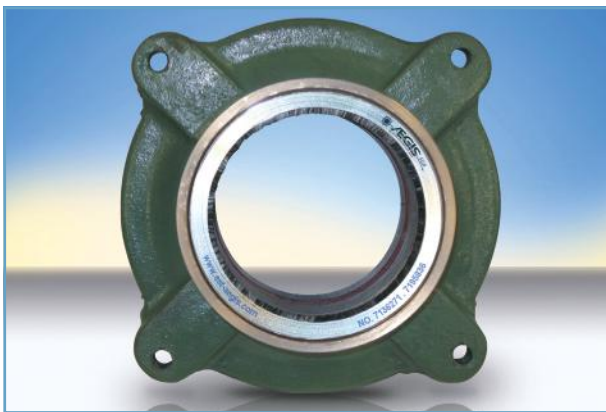


An AEGIS® Shaft Grounding Ring mounted in the lower bearing retainer of a vertical pump motor.

### Revolutionary AEGIS® Nanogap Technology...

Key to the AEGIS® Shaft Grounding Ring's effectiveness is its patented Nanogap Technology, which ensures superior contact/noncontact grounding protection for the normal service life of the motor's bearings.

The AEGIS® ring's unique design includes proprietary conductive microfibers arranged in a continuous circle

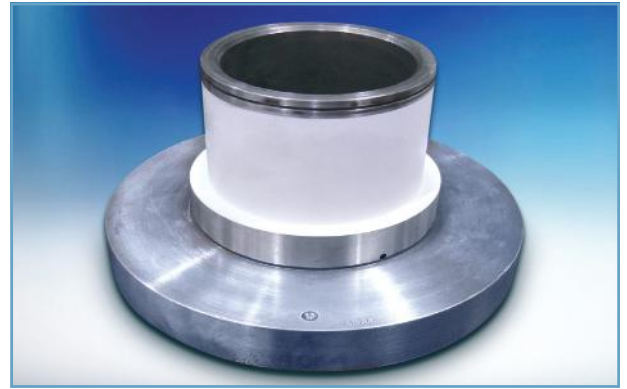

IEMCO coats all vertical pump motor carriers with ceramic insulation, using proprietary techniques.

around the motor shaft, providing hundreds of thousands of voltage discharge contact points. These microfibers maintain electrical contact for the life of the bearing — even if physical contact is lost — through 3 distinct noncontact electron transfer processes that work simultaneously. These noncontact nanogap processes provide highly effective electron transfer — even in the presence of grease, oil, dust, and other contaminants — and are unaffected by motor speed. No other grounding product works with both contact and noncontact electron transfer, and no other product offers the long-term, maintenance-free performance of the AEGIS® ring.

### ...and a Systematic Approach

For vertical hollow-shaft motors, IEMCO's systematic approach requires the AEGIS® ring to remove the voltage and a well-tooled carrier to control the voltage until it is removed, so it doesn't transfer to attached equipment.

Some carriers conduct electricity, but Wilkins is convinced that a carrier should be electrically isolated, disconnecting the motor from the pump shaft electrically though not mechanically. In addition to protecting the motor's thrust bearing from electrical damage, this keeps shaft currents from jumping to the bearings of the pump itself, or to the bearings of a gearbox, tachometer, encoder, etc.

To apply the coating of ceramic, IEMCO uses a tightly controlled flame-spray welding procedure. Wilkins' team also grinds each newly coated carrier to very tight tolerances. The finished carrier has a hardness of Rockwell 50C and provides a resistance of more than 1 gigaohm at 1000 volts — far better than the National Electrical Manufacturers Association (NEMA) standard of 1 megaohm at 500 volts.

IEMCO is not the first motor repair shop to attempt to VFD-proof vertical hollow shaft motors, but it may be the first shop to do it right. Notes Wilkins, "After we've added the grounding ring and upgraded the carrier, the motor is truly inverter-ready."

For more information, contact:



# CORRO-DUTY® Vertical HOLLOSHAFT® Inverter Duty Motors

In Stock Totally Enclosed Fan Cooled,  
Premium Efficient Vertical Motors

**Horsepower:** 5–300 HP

**Poles:** 2 & 4 (3600 & 1800 RPM)

**Rated Voltage:** 230/460V or 460V 60Hz

**Frame Size:** 184-449

**Enclosure:** Totally Enclosed Fan Cooled  
(TEFC)

**Efficiency Level:** NEMA Premium®†  
Efficient, Inverter Duty



## Product Overview

All cast iron, U.S. MOTORS® brand CORRO-DUTY® Vertical HOLLOSHAFT® Inverter Duty Motors are now in stock.

CORRO-DUTY® Vertical HOLLOSHAFT® Inverter Duty motors are designed with a 1.0 service factor (1.15 S.F. on sinewave power) with full Class H insulating materials designed to withstand the

steep-wave-front voltage impressed by the VFD waveform and are designed to run smoother and cooler on inverter power supplies, which can lead to improved system efficiency and reliability.

## Product Features

- CORRO-DUTY – all cast iron construction
- Class H INVERTER GRADE® insulation
- Class B rise at full load (sine wave power)
- 1.15 Service Factor (sine wave power)
- Inverter duty per NEMA®† MG-1 Part 31 at 1.0 S.F.
- Maximum 40°C ambient, 3,300 feet altitude
- Premium Efficient design
- Thrust capacities among highest in industry
- Special balance
- 115-volt space heater
- Internal AEGIS®† Shaft Grounding Ring
- Upper insulated bearing 400 Frame & Up
- Non-Reverse Ratchet, BALLOMATIC®
  - First technology of its kind in the market
  - Prevents reverse rotation
- LUBRIPORT® oil sight level window on 400 Frame & up



BALLOMATIC®  
Ratchet



## Conversion Options

- Coupling (change to alternate)
- P-Base (change to alternate diameter)
- Fire pump label
- Special paint
- Steady bushing
- Tests – short commercial or complete initial

## Vertical HOLLOSHAFT® High Thrust Motors - "P" Base, Three Phase TEFC CORRO-DUTY® Premium Efficient, Inverter Duty

| HP    | RPM  | Volts   | Frame  | Catalog Number | Type  | List w/ NRR | List w/ SRC | NEMA Nom. Eff. | Down Thrust (lbs) | Base Dia. (in.) | Cplg Height (in.) | Cplg BX (in.) | Cplg Key Size | Ship Wt. (lbs.) | Notes   |
|-------|------|---------|--------|----------------|-------|-------------|-------------|----------------|-------------------|-----------------|-------------------|---------------|---------------|-----------------|---------|
| 5     | 3600 | 230/460 | 184TP  | CHT5V1BLE      | TUCI  | \$3,893     | \$3,560     | 88.5           | 2200              | 10              | 17-1/2            | 1             | 1/4           | 180             | 51,97,D |
|       | 3600 | 575     | 184TP  | CHT5V1GLE      | TUCI  | \$3,893     | \$3,560     | 88.5           | 2200              | 10              | 17-1/2            | 1             | 1/4           | 180             | 51,97,D |
|       | 1800 | 230/460 | 184TP  | CHT5V2BLE      | TUCI  | \$3,654     | \$3,321     | 89.5           | 2500              | 10              | 17-1/2            | 1             | 1/4           | 180             | 51,97,D |
|       | 1800 | 575     | 184TP  | CHT5V2GLE      | TUCI  | \$3,654     | \$3,321     | 89.5           | 2500              | 10              | 17-1/2            | 1             | 1/4           | 180             | 51,97,D |
| 7 1/2 | 3600 | 230/460 | 213TP  | CHT7V1BLE      | TUCI  | \$4,044     | \$3,701     | 89.5           | 2200              | 10              | 17-1/2            | 1             | 1/4           | 220             | 51,97,D |
|       | 3600 | 575     | 213TP  | CHT7V1GLE      | TUCI  | \$4,044     | \$3,701     | 89.5           | 2200              | 10              | 17-1/2            | 1             | 1/4           | 220             | 51,97,D |
|       | 1800 | 230/460 | 213TP  | CHT7V2BLE      | TUCI  | \$3,962     | \$3,619     | 91.7           | 2500              | 10              | 17-1/2            | 1             | 1/4           | 220             | 51,97,D |
|       | 1800 | 575     | 213TP  | CHT7V2GLE      | TUCI  | \$3,962     | \$3,619     | 91.7           | 2500              | 10              | 17-1/2            | 1             | 1/4           | 220             | 51,97,D |
| 10    | 3600 | 230/460 | 215TP  | CHT10V1BLE     | TUCI  | \$4,398     | \$4,046     | 90.2           | 2200              | 10              | 17-1/2            | 1             | 1/4           | 230             | 51,97,D |
|       | 3600 | 575     | 215TP  | CHT10V1GLE     | TUCI  | \$4,398     | \$4,046     | 90.2           | 2200              | 10              | 17-1/2            | 1             | 1/4           | 230             | 51,97,D |
|       | 1800 | 230/460 | 215TP  | CHT10V2BLE     | TUCI  | \$4,307     | \$3,955     | 91.7           | 2500              | 10              | 17-1/2            | 1             | 1/4           | 230             | 51,97,D |
|       | 1800 | 575     | 215TP  | CHT10V2GLE     | TUCI  | \$4,307     | \$3,955     | 91.7           | 2500              | 10              | 17-1/2            | 1             | 1/4           | 230             | 51,97,D |
| 15    | 3600 | 230/460 | 254TP  | CHT15V1BLE     | TUCI  | \$4,945     | \$4,532     | 91.0           | 3300              | 10              | 22-15/16          | 1             | 1/4           | 395             | 51,97,D |
|       | 3600 | 575     | 254TP  | CHT15V1GLE     | TUCI  | \$4,945     | \$4,532     | 91.0           | 3300              | 10              | 22-15/16          | 1             | 1/4           | 395             | 51,97,D |
|       | 1800 | 230/460 | 254TP  | CHT15V2BLE     | TUCI  | \$6,019     | \$5,596     | 92.4           | 3300              | 10              | 22-15/16          | 1             | 1/4           | 395             | 51,97,D |
|       | 1800 | 575     | 254TP  | CHT15V2GLE     | TUCI  | \$6,019     | \$5,596     | 92.4           | 3300              | 10              | 22-15/16          | 1             | 1/4           | 395             | 51,97,D |
| 20    | 1800 | 230/460 | 256TP  | CHT20V2BLE     | TUCI  | \$6,703     | \$6,215     | 93.0           | 3300              | 10              | 22-15/16          | 1             | 1/4           | 405             | 51,97,D |
|       | 1800 | 575     | 256TP  | CHT20V2GLE     | TUCI  | \$6,703     | \$6,215     | 93.0           | 3300              | 10              | 22-15/16          | 1             | 1/4           | 405             | 51,97,D |
| 25    | 1800 | 230/460 | 284TPA | CHT25V2BLF     | TUCI  | \$7,565     | \$7,020     | 93.6           | 3300              | 12              | 26-9/16           | 1             | 1/4           | 500             | 51,97,D |
|       | 1800 | 575     | 284TPA | CHT25V2GLF     | TUCI  | \$7,565     | \$7,020     | 93.6           | 3300              | 12              | 26-9/16           | 1             | 1/4           | 500             | 51,97,D |
| 30    | 1800 | 230/460 | 286TPA | CHT30V2BLF     | TUCI  | \$8,337     | \$7,727     | 93.6           | 3300              | 12              | 26-9/16           | 1             | 1/4           | 520             | 51,97,D |
|       | 1800 | 575     | 286TPA | CHT30V2GLF     | TUCI  | \$8,337     | \$7,727     | 93.6           | 3300              | 12              | 26-9/16           | 1             | 1/4           | 520             | 51,97,D |
| 40    | 1800 | 230/460 | 324TP  | CHT40V2BLG     | TUCI  | \$10,564    | \$9,883     | 94.5           | 4500              | 16-1/2          | 28-1/2            | 1-1/2         | 3/8           | 740             | 51,97,D |
|       | 1800 | 575     | 324TP  | CHT40V2GLG     | TUCI  | \$10,564    | \$9,883     | 94.1           | 4500              | 16-1/2          | 28-1/2            | 1-1/2         | 3/8           | 740             | 51,97,D |
| 50    | 1800 | 230/460 | 326TP  | CHT50V2BLG     | TUCI  | \$12,194    | \$11,386    | 94.5           | 4500              | 16-1/2          | 28-1/2            | 1-1/2         | 3/8           | 750             | 51,97,D |
|       | 1800 | 575     | 326TP  | CHT50V2GLG     | TUCI  | \$12,194    | \$11,386    | 94.5           | 4500              | 16-1/2          | 28-1/2            | 1-1/2         | 3/8           | 750             | 51,97,D |
| 60    | 1800 | 460     | 364TP  | CHT60V2CLG     | TUCI  | \$15,131    | \$14,131    | 95.0           | 5600              | 16-1/2          | 30                | 1-1/4         | 1/4           | 925             | 51,97,D |
|       | 1800 | 575     | 364TP  | CHT60V2GLG     | TUCI  | \$15,131    | \$14,131    | 95.0           | 5600              | 16-1/2          | 30                | 1-1/4         | 1/4           | 925             | 51,97,D |
| 75    | 1800 | 460     | 365TP  | CHT75V2CLG     | TUCI  | \$17,917    | \$16,706    | 95.4           | 5600              | 16-1/2          | 30                | 1-1/4         | 1/4           | 940             | 51,97,D |
|       | 1800 | 575     | 365TP  | CHT75V2GLG     | TUCI  | \$17,917    | \$16,706    | 95.4           | 5600              | 16-1/2          | 30                | 1-1/4         | 1/4           | 940             | 51,97,D |
| 100   | 1800 | 460     | 405TP  | CHT100V2CLG    | TUCI  | \$24,122    | \$22,488    | 95.4           | 7000              | 16-1/2          | 39-15/16          | 1-1/2         | 3/8           | 1600            | 51,97,E |
|       | 1800 | 575     | 405TP  | CHT100V2GLG    | TUCI  | \$24,122    | \$22,488    | 95.4           | 7000              | 16-1/2          | 39-15/16          | 1-1/2         | 3/8           | 1600            | 51,97,E |
| 125   | 1800 | 460     | 444TP  | CHT125V2CLG    | TUCI  | \$33,598    | \$31,729    | 95.4           | 9300              | 16-1/2          | 42-1/2            | 1-1/2         | 3/8           | 1900            | 51,97,E |
|       | 1800 | 575     | 444TP  | CHT125V2GLG    | TUCI  | \$33,598    | \$31,729    | 95.4           | 9300              | 16-1/2          | 42-1/2            | 1-1/2         | 3/8           | 1900            | 51,97,E |
| 150   | 1800 | 460     | 447TP  | CHT150V2CLG    | TUCI  | \$39,655    | \$37,373    | 95.8           | 9300              | 16-1/2          | 46                | 1-1/2         | 3/8           | 2300            | 51,97,E |
|       | 1800 | 575     | 447TP  | CHT150V2GLG    | TUCI  | \$39,655    | \$37,373    | 95.8           | 9300              | 16-1/2          | 46                | 1-1/2         | 3/8           | 2300            | 51,97,E |
| 200   | 1800 | 460     | 447TP  | CHT200V2CLG    | TUCI  | \$52,944    | \$49,756    | 96.2           | 9300              | 16-1/2          | 46                | 1-11/16       | 3/8           | 2300            | 51,97,E |
|       | 1800 | 575     | 447TP  | CHT200V2GLG    | TUCI  | \$52,944    | \$49,756    | 96.2           | 9300              | 16-1/2          | 46                | 1-11/16       | 3/8           | 2300            | 51,97,E |
| 250   | 1800 | 460     | 449TP  | CHT250V2CLJX   | JUCEI | \$61,776    | \$60,424    | 96.2           | 15400             | 24-1/2          | 56-7/8            | 1-11/16       | 3/8           | 3800            | 51,97,E |
|       | 1800 | 575     | 449TP  | CHT250V2GLJX   | JUCEI | \$61,776    | \$60,424    | 96.2           | 15400             | 24-1/2          | 56-7/8            | 1-11/16       | 3/8           | 3800            | 51,97,E |
| 300   | 1800 | 460     | 449TP  | CHT300V2CLJX   | JUCEI | \$67,994    | \$66,482    | 96.2           | 15400             | 24-1/2          | 56-7/8            | 1-15/16       | 1/2           | 3900            | 51,97,E |
|       | 1800 | 575     | 449TP  | CHT300V2GLJX   | JUCEI | \$67,994    | \$66,482    | 96.2           | 15400             | 24-1/2          | 56-7/8            | 1-15/16       | 1/2           | 3900            | 51,97,E |

Note 51 equipped with winding thermostat

Note 97 inverter duty with inverter grade insulation

Note D includes internal shaft grounding ring

Note E includes internal shaft grounding ring and upper insulated bearing

For additional information, please refer to our Full Line Standard Motor Catalog (FL600) or contact your Nidec Motor Corporation representative

† All marks shown within this document are properties of their respective owners.

Nidec Motor Corporation, © 2019; All Rights Reserved. U.S. MOTORS® is a registered trademark of Nidec Motor Corporation.  
Nidec Motor Corporation trademarks followed by the ® symbol are registered with the U.S. Patent and Trademark Office.



NIDEC MOTOR CORPORATION

[www.usmotors.com](http://www.usmotors.com)

CORRO-DUTY VHS INVERTER DUTY FL600 MODELS Rev. 05/19

8050 W. Florissant Avenue | St. Louis, MO 63136

Phone: 888-637-7333 | Fax: 866-422-7758